

 ICOM

IC-F200

UHF TRANSCEIVER


Rugged, Easy Operation in the Palm of Your Hand



High Definition
and Clear Display
with 4 Digits and 14 Segments



Compact Size
and Smart Rugged Design
with Water Resistance



Actual size



15 Hours Operation with
Detachable Type Battery

USB Charging

OTHER FEATURES

- 600 mW AF output
- User friendly key operation
- 2 programmable keys
- CTCSS / DTCS tone squelch
- VOX function
- USB Type-C™ charging for direct radio body connection
- QR code for product authenticity check
- IP54 / MIL810G

Communication Range


 Up to **250,000** sq ft in a building*
  Up to **20** floors in a building*
  Up to **2** miles in a work site*

*Communication range may differ depending on operating environment or weather conditions, etc.


OPTIONAL ACCESSORIES

HEADSETS and PTT SWITCH CABLE

- HS-94** Headset Ear-hook type **HS-95** Headset Neck arm type **HS-97** Headset Throat mic type

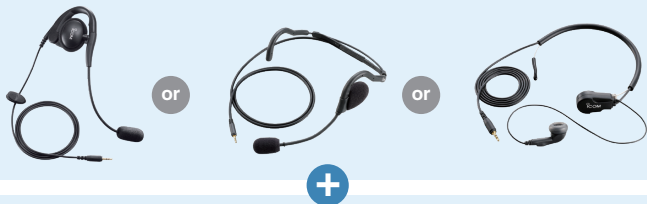

- OPC-2006LS** Conversion Cable for VOX function **OPC-2328** PTT Switch Cable



(Either the OPC-2006LS or OPC-2328 is required for use with the HS-94, HS-95 or HS-97.)

BATTERY PACK / BATTERY CHARGERS

- BP-304A** Battery Pack Li-ion 3.6 V 2350 mAh typ. 2200 mAh min. **BC-263A** USB Type-C™ AC adapter **BC-262** Charging Cradle **BC-264** Battery Charger



SPECIFICATIONS

Frequency coverage	450–470 MHz
Number of channels	16 channels
Output power	2.0 W
Receiver sensitivity	12 dB SINAD N : –122 dBm typ. (0.18 μV typ.)
Type of emission	N : 11K0F3E (12.5 kHz) for USA , EXP W : 16K0F3E (25.0 kHz) for EXP
Audio power output	Internal Speaker : 600 mW typ. @5 % distortion with 4 Ω External Speaker : 150 mW typ. @5 % distortion with 8 Ω
Antenna impedance	50 Ω
Power supply voltage	3.7 V DC nominal
Current drain	Receive Max. Audio : 0.8 A Max. Transmit : 1.8 A Max.
Dimensions	H 156.0 × W 50.0 × D 26.7 mm , H 6.1 × W 2.0 × D 1.1 inch incl. antenna H 94.0 × W 50.0 × D 26.7 mm , H 3.7 × W 2.0 × D 1.1 inch excl. antenna
Weight	157 g , 5.5 oz

All stated specifications are subject to change without notice or obligation.

Supplied Accessories

- * depending on version
- MB-127 Belt Clip
 - BP-304A Battery Pack
 - BC-262 Charging Cradle
 - BC-263A USB Type-C™ AC adapter or USB Type-C™ Cable*

Made in Japan : The IC-F200 is designed by Icom Inc and produced at Wakayama Icom Inc.

MICROPHONES

- HM-153LS** Earphone Microphone **HM-166LS** Earphone Microphone **HM-183LS** Speaker Microphone **HM-186LS** Speaker Microphone



OTHER ACCESSORIES

- MB-127** Belt clip **OPC-2006LS** Conversion Cable for VOX function **OPC-2328** PTT Switch Cable



PARTNER PRODUCTS

- IJKP-HM-1LS-OW** Earphone Microphone Acoustic Type Earphone **IJKP-HM-2LS-OW** Earphone Microphone C Type Earphone **IJKP-HM-3LS-OW** Earphone Microphone D Type Earphone



Icom and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and /or other countries. USB Type-C is a trademark of USB Implementers Forum, Inc. QR Code is a trademark of DENSO WAVE INCORPORATED. All other trademarks are the properties of their respective holders.